

General Description

The DS34C86T is a quad differential line receiver designed to meet the RS-422, RS-423, and Federal Standards 1020 and 1030 for balanced and unbalanced digital data transmission, while retaining the low power characteristics of CMOS. The DS34C86T has an input sensitivity of 200 mV over the common mode input voltage range of $\pm 7V$. Hysteresis is provided to improve noise margin and discourage output instability for slowly changing input waveforms.


The DS34C86T features internal pull-up and pull-down resistors which prevent output oscillation on unused channels.

Separate enable pins allow independent control of receiver pairs. The TRI-STATE[®] outputs have 6 mA source and sink capability. The DS34C86T is pin compatible with the DS3486.


Features

- .cmos design for low power
- . $\pm 0.2V$ sensitivity over the input common mode voltage range
- .Typical propagation delays: 19ns
- .Typical input hysteresis:60mV
- .Inputs won't load line when $V_{cc}=0V$
- .Meets the requirements of EIA standard RS-422
- .TRI-STATE outputs for system bus compatibility
- .Available in surface mount
- .Open input Failsafe feature, output high for open input

Logic Diagram

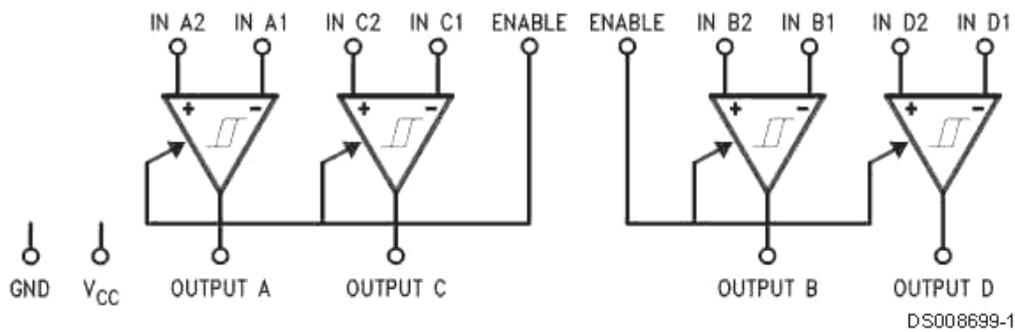

Connection Diagram

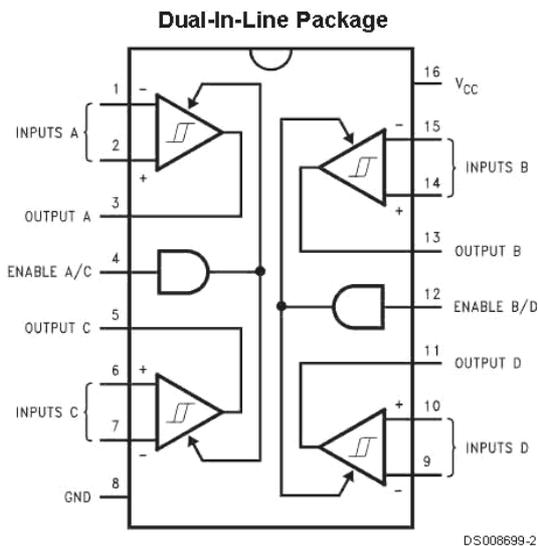

Top View

Order Number DS34C86TM, and DS34C86TN
See NS Package Number M16A and N16E

Truth Table

Enable	Input	Output
L	X	Z
H	$V_{ID} \geq V_{TH} (Max)$	H
H	$V_{ID} \geq V_{TH} (Min)$	L
H	Open*	H

*Open, not terminated

Z=TRI-STATE

TRI-STATE[®] is a registered trademark of Artschip Semiconductor Corporation.

Absolute Maximum Ratings (Notes 1,2)

If Military/Aerospace specified devices are required, please contact the National semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (Vcc)	7V
Input Common Mode Range (Vcm)	±14V
Differential Input Voltage (V _{DIFF})	±14V
Enable Input Voltage (V _{IN})	7V
Storage Temperature Range (T _{STG})	-65 to +150
Lead Temperature (Soldering 4 sec)	260

Maximum Power Dissipation at 25 (Note 5)

Plastic "N" Package	1645mW
SOIC Package	1190mW
Current Per Output	±25mA

This device does not meet 2000V ESD rating. (Note 4)

Operating Conditions

	Min	Max	unit
Supply Voltage (Vcc)	4.50	5.50	V
Operating Temperature Range (T _A)	-40	-85	
Enable Input Rise or Fall Times		500	ns

DS Electrical Characteristics (Note 3)

Vcc=5V ±10% (unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{TH}	Minimum Differential Input Voltage	V _{OUT} = V _{OH} or V _{OL} -7V < V _{CM} < +7V	-200	35	+200	mV
R _{IN}	Input Resistance	V _{IN} = -7V, +7V (Other Input = GND)	5.0	6.8	10	k
I _{IN}	Input Current (Under Test)	V _{IN} = +10V, Other Input = GND V _{IN} = -10V, Other Input = GND		+1.1 -2.0	+1.5 -2.5	mA mA
V _{OH}	Minimum High Level Output Voltage	Vcc = Min., V _(DIFF) = +1V I _{OUT} = -6.0mA	3.8	4.2		V
V _{OL}	Maximum Low Level Output Voltage	Vcc = Max., V _(DIFF) = -1V I _{OUT} = 6.0mA		0.2	0.3	V
V _{IH}	Minimum Enable High Input Level Voltage		2.0			V
V _{IL}	Maximum Enable Low Input Level Voltage				0.8	V
I _{OZ}	Maximum TRI-STATE Output Leakage Current	V _{OUT} = Vcc or GND, TRI-STATE Control = V _{IL}		±0.5	±0.5	µA
I _I	Maximum Enable Input Current	V _{IN} = Vcc or GND			±1.0	µA
I _{CC}	Quiescent Power Supply Current	Vcc = Max, V _(DIFF) = +1V		16	23	mA
V _{HYST}	Input Hysteresis	V _{CM} = 0V		60		mV

AC Electrical Characteristics (Note 3)

Vcc = 5V ±10% (unless otherwise specified) (Figures 1,2,3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PLH} , t _{PHL}	Propagation Delay Input to Output	C _L = 50pF V _{DIFF} = 2.5V V _{CM} = 0V		19	30	ns
t _{RISE} , t _{FALL}	Output Rise and Fall Times	C _L = 50pF V _{DIFF} = 2.5V V _{CM} = 0V		4	9	ns
t _{PLZ} , t _{PHZ}	Propagation Delay ENABLE to Output	C _L = 50pF R _L = 1000Ω V _{DIFF} = 2.5V		13	18	ns

AC Electrical Characteristics (Note 3) (Continued)

V_{CC}=5V ±10% (unless otherwise specified) (Figures 1,2,3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PZL} , t _{PZH}	Propagation Delay ENABLE to Output	C _L =50pF R _L =1000Ω V _{DIFF} =2.5V		13	21	NS

Note 1: Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the device should be operated at these limits. The table of “Electrical Characteristics” provides conditions for actual device operation.

Note 2: Unless otherwise specified, all voltages are referenced to ground.

Note 3: Unless otherwise specified, Min/Max limits apply across the operating temperature range. All typicals are given for V_{CC}=5V and T_A=25 °C.

Note 4: ESD Rating; HBM (1.5kΩ, 100pF)

Inputs ≥2000V

All other pins ≥1000V

EIAJ (0Ω,200pF) ≥350V

Note 5: Rating apply to ambient temperature at 25 °C. Above this temperature derate N Package 13.16 mW/°C, and M Package 9.52mW/°C.

Comparison Table of Switching Characteristics into “LS-Type” Load (Note 6)

V_{CC} =5V, T_A=25 °C (Figure 4,5)

Symbol	Parameter	DS34C86		DS3486		Units
		Typ	Max	Typ	Max	
t _{PHL(D)}	Propagation Delay Time Output High to Low	17		19		ns
t _{PLH(D)}	Propagation Delay Time Output Low to High	19		19		ns
t _{PLZ}	Output Low to TRI-STATE	13		23		ns
t _{PHZ}	Output High to TRI-STATE	12		25		ns
t _{PZH}	Output TRI-STATE to High	13		18		ns
t _{PZL}	Output TRI-STATE to Low	13		20		ns

Note 6: This Table is provided for comparison purposes only. The values in this table for the DS34C86 reflect the performance of the device but are not tested or guaranteed.

Test and Switching Waveform


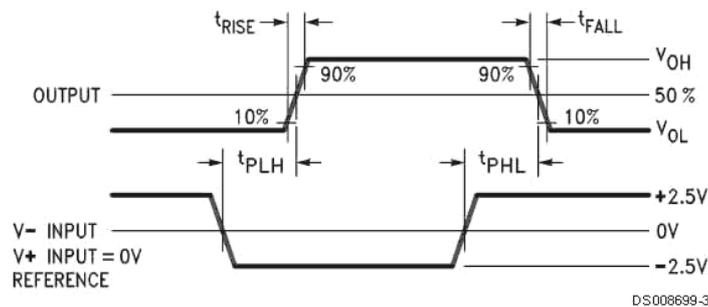


FIGURE 1. Propagation Delays

Test and Switching Waveforms (Continued)

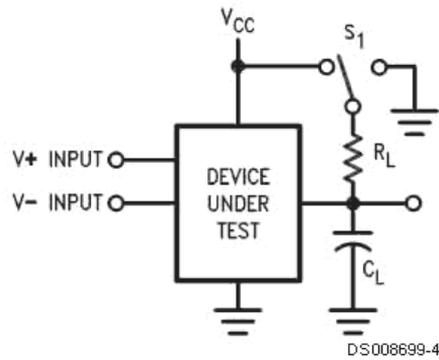

CL Includes load and test jig capacitance.
 S1=Vcc for t_{PZL} , and t_{PLZ} measurements.
 S1=GND for t_{PZH} , and t_{PHZ} measurements.

FIGURE 2. Test Circuit for TRI-STATE Output Tests


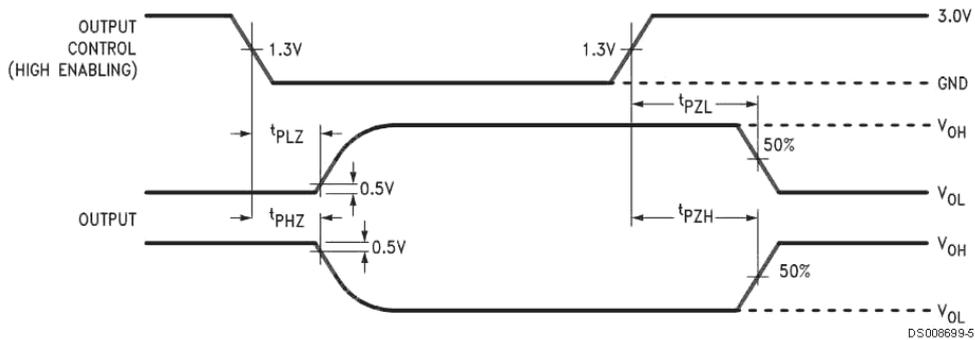


FIGURE 3. TRI-STATE Output Enable and Disable waveforms


AC Test Circuits and Switching Time Waveforms

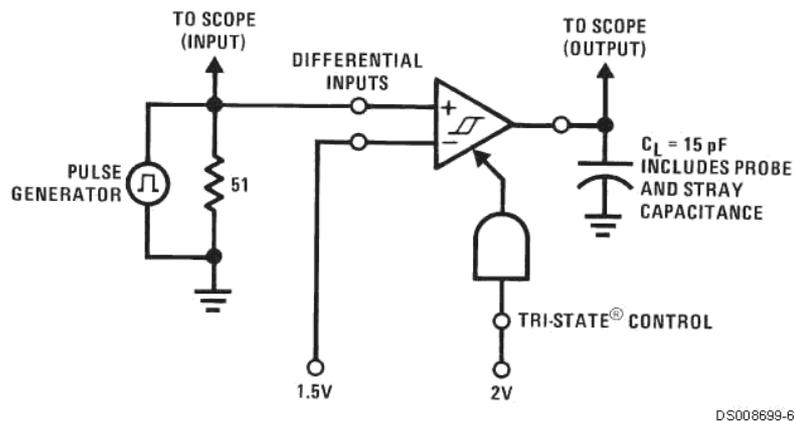

Input Pulse Characteristics:
 $t_{TLH} = t_{TLH} = 6\text{ns}$ (10% to 90%)
 PRR = 1 MHz, 50% duty cycle


FIGURE 4. Propagation Delay Differential Input to Output for "LS-TYPE" Load

AC Test Circuit and Switching Time Wave forms (Continued)

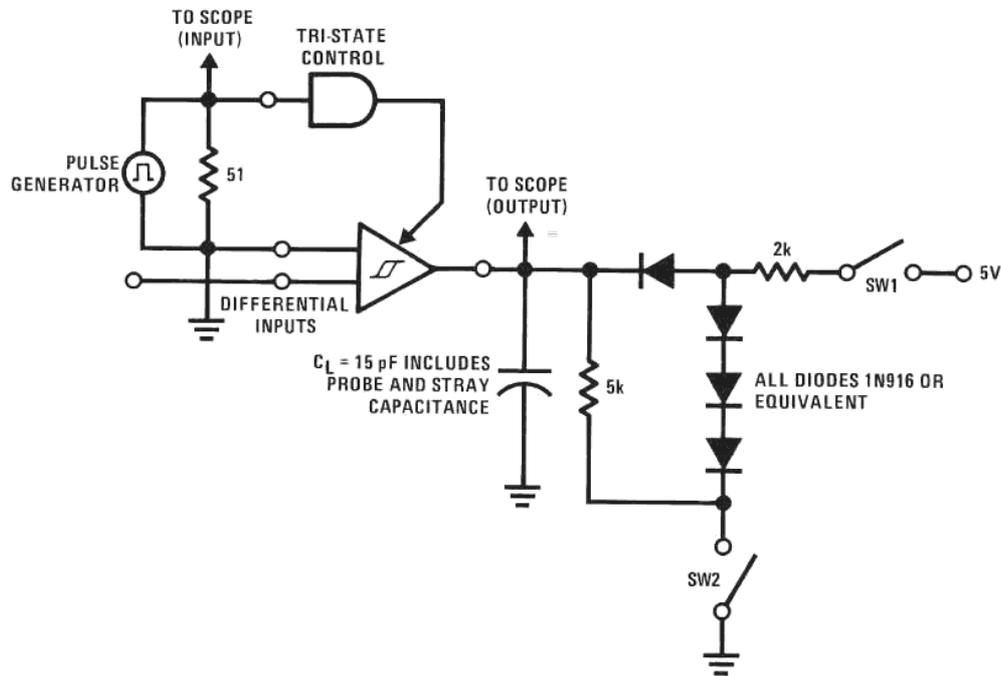


DS008699-8


1.5V for t_{PHZ} and t_{PHZ}
 -1.5V for t_{PLZ} and t_{PHZ}
 Input Pulse Characteristics:
 $t_{TLH} = t_{TLH} = 6\text{ns}$ (10% to 90%)
 PRR=1MHz, 50% duty cycle

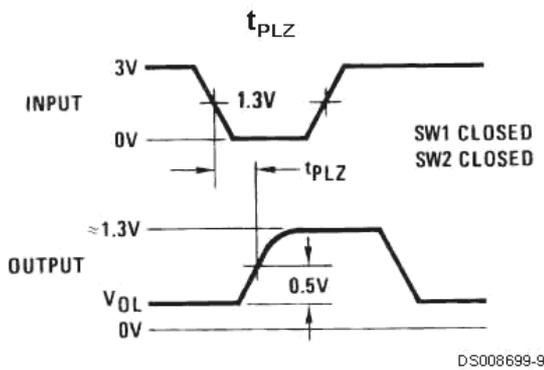


DS008699-9

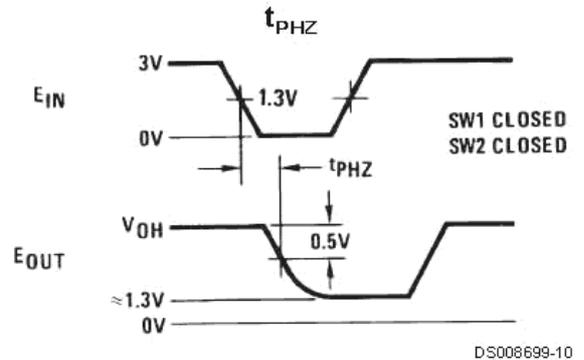

DS008699-10

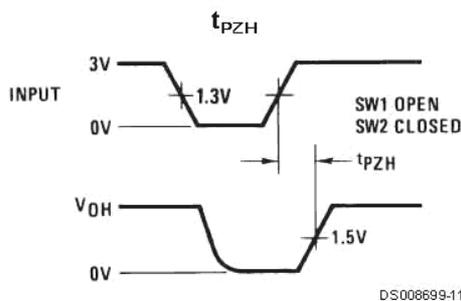


DS008699-11

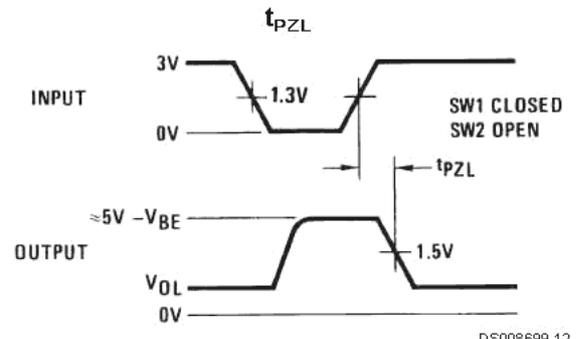


DS008699-12

FIGURE 5. Propagation Delay TRI-STATE Control Unit to Output for "LS-Type" Load

Physical Dimensions inches (millimeters) unless otherwise noted

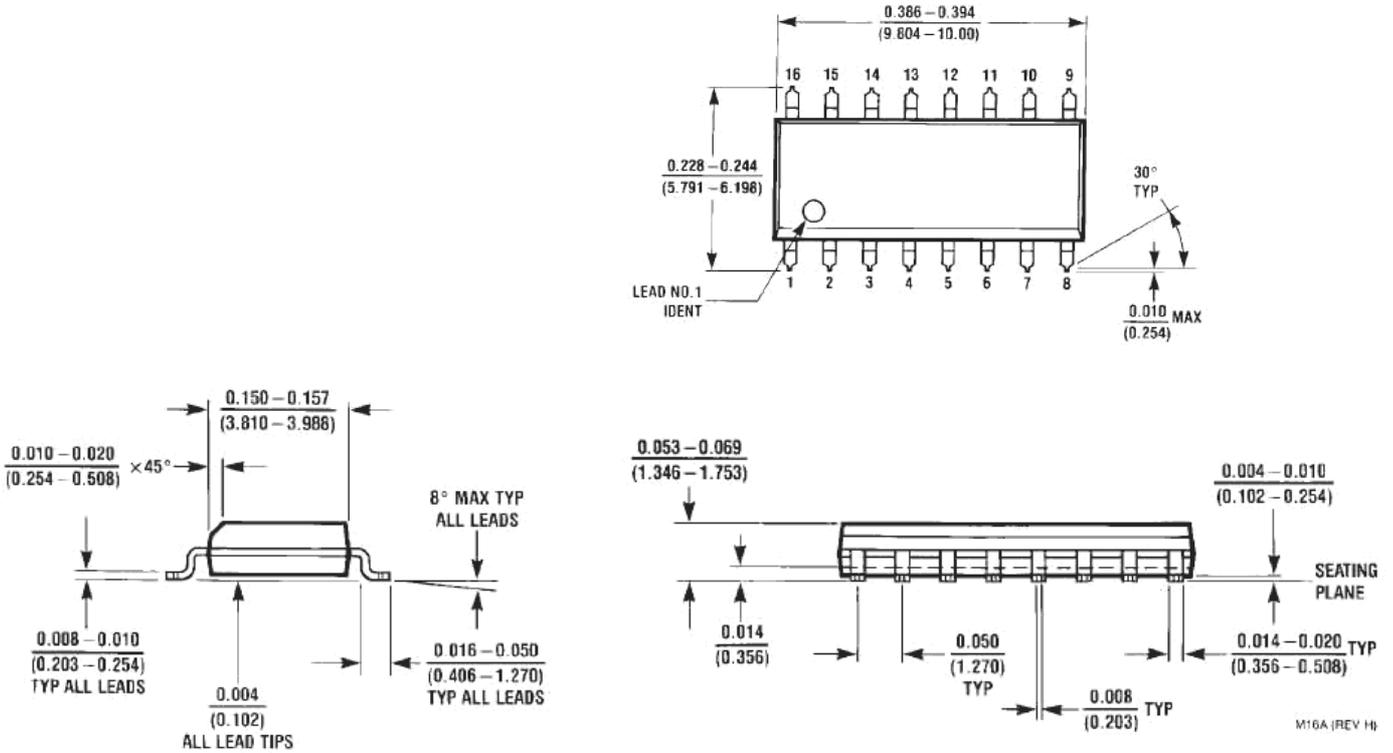

16-Lead Molded Small Outline Package (M)
Order Number DS34c86TM
NS Package Number M16A

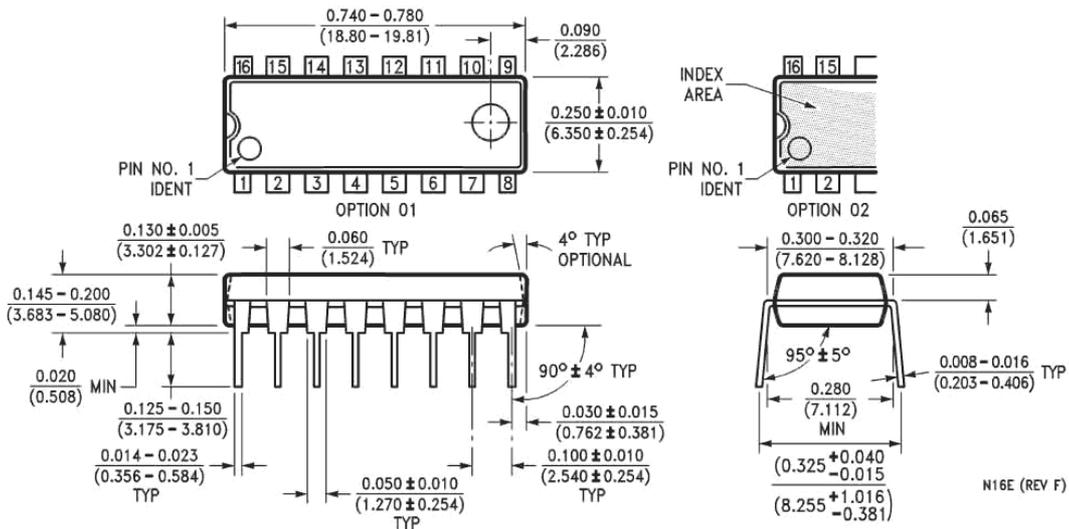

16-Lead Dual-In-Line Package (N)
Order Number DS34C86TN
NS Package Number N16E