

DS34C87T CMOS Quad TRI-STATE Differential Line Driver

General Description

The DS34C87T is a quad differential line driver designed for digital data transmission over balanced lines. The DS34C87T meets all the requirements of EIA standard RS-422 while retaining the low power characteristics of CMOS. This enables the construction of serial and terminal interfaces while maintaining minimal power consumption.


The DS34C87T accepts TTL or CMOS input levels and translates these to RS-422 output levels. This part uses special output circuitry that enables the individual drivers to power down without loading down the bus. This device has separate enable circuitry for each pair of the four drivers. The DS34C87T is pin compatible to the DS3487T.

All inputs are protected against damage due to electrostatic discharge by diodes to Vcc and ground.


Features

- .TTL inputs compatible
- .Typical propagation delays:6ns
- .Typical output skew: 0.5ns
- .Outputs won't load line when Vcc =0V
- .Meets the requirements of EIA standard RS-422
- .Operation from single 5V supply
- .TRI-STATE outputs for connection to system buses
- .Low quiescent current
- .Available in surface mount

Connection and Logic Diagrams

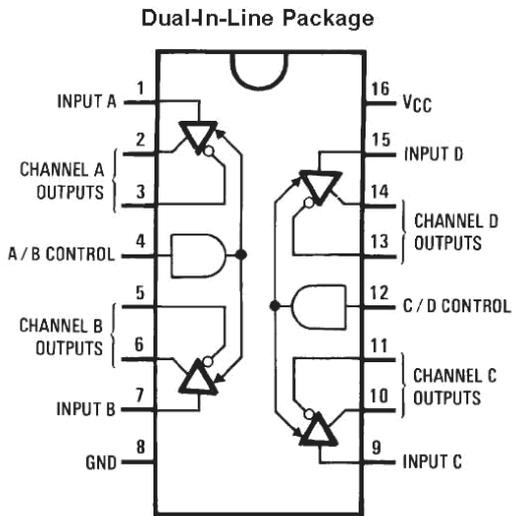

00857601

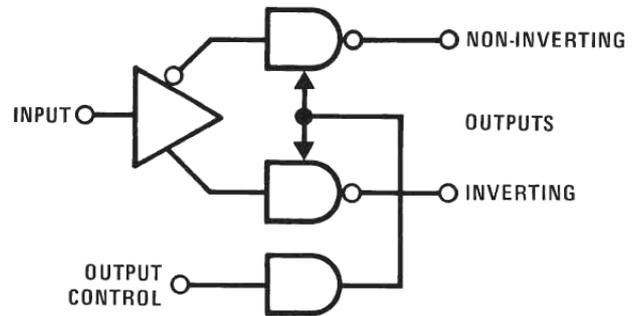

00857602

Truth Table

Input	Control Input	Non-Inverting Output	Inverting Output
H	H	H	L
L	H	L	H
X	L	Z	Z

L=Low logic state

H=High logic state

X=Irrelevant

Z=TRI-STATE(high performance)

See Pin Description Table for details Top View

Order Number DS34c87TM or D34C87TN See NS Package

Number M16A or N16E

Absolute Maximum Ratings (Notes 1, 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V _{CC})	-0.5V to 7.0V
DC Voltage (V _{IN})	-1.5V to V _{CC} +1.5V
DC Output Voltage (V _{OUT})	-0.5 to 7V
Clamp Diode Current (I _{IK} , I _{OK})	±20mA
DC Output Current, per pin (I _{OUT})	±150mA
Storage Temperature Range (T _{STG})	-65 to +150
Maximum Power Dissipation (P _D) @ 25	(Note 3)

Plastic "N" Package	1736mW
SOIC Package	1226mW
Lead Temperature (TL) (Soldering 4 sec)	260
This device does not meet 2000V ESD rating. (Note 12)	

Operating Conditions

	Min	Max	Units
Supply Voltage (V _{CC})	4.50	5.50	V
DC Input or Output Voltage (V _{IN} , V _{OUT})	0	V _{CC}	V
Operating Temperature Range (TA) DS34C87T	-40	+85	
Input Rise or Fall Times (t _r , t _f)		500	ns

DC Electrical Characteristics (Note 4)

V_{CC} = 5V ± 10% (unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{IH}	High Level Input Voltage		2.0			V
V _{IL}	Low Level Input Voltage				0.8	V
V _{OH}	High Level Output Voltage	V _{IN} =V _{IH} or V _{IL} , I _{OUT} =-20mA	2.5	3.4		V
V _{OL}	Low Level Output Voltage	V _{IN} =V _{IH} or V _{IL} , I _{OUT} =48mA		0.3	0.5	V
V _T	Differential Output Voltage	R _L =100Ω (Note 5)	2.0	3.1		V
V _T - V _T	Difference In Differential Output	R _L =100Ω (Note 5)			0.4	V
V _{OS}	Common Mode Output Voltage	R _L =100Ω (Note 5)		2.0	3.0	V
V _{OS} - V _{OS}	Difference In Common Mode Output	R _L =100Ω (Note 5)			0.4	V
I _{IN}	Input Current	V _{IN} = V _{CC} , GND, V _{IH} , or V _{IL}			±1.0	μA
I _{CC}	Quiescent Supply Current	I _{OUT} = 0μA, V _{IN} =V _{CC} or GND V _{IN} =2.4V or 0.5V (Note 6)		200 0.8	500 2.0	μA mA
I _{OZ}	TRI-STATE™ Output Leakage Current	V _{OUT} = V _{CC} or GND Control =V _{IL}		±0.5	±0.5	μA
I _{SC}	Output Short Circuit Current	V _{IN} =V _{CC} or GND (Notes 5,7)	-30		-150	mA
I _{OFF}	Power Off Output Leakage Current	V _{CC} = 0V (Note 5)		V _{OUT} =6V V _{OUT} =-0.25V		100 -100 μA μA

Note 1: Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. They are not mean to imply that the device should be operated at these limits. The table of "Electrical Characteristics" provide conditions for actual device operation.

Note 2: Unless otherwise specified, all voltages are referenced to ground. All current into device pins are positive; all currents out of device pins are negative.

Note 3: Ratings apply to ambient temperature at 25 . Above this temperature derate N package 13.89 mW/ , and M package 9.80mW/ .

Note 4: Unless otherwise specified, min/max limits apply across the -40 to 85 temperature range. All typicals are given for V_{CC} =5V and T_A =25 .

Note 5: See EIA Specification RS-422 for exact test conditions.

Note 6: Measured per input. All other inputs at V_{CC} or GND.

Note 7: This is the current sourced when a high output is shorted to ground. Only one output at a time should be shorted.

Switching Characteristics (Note 4)
 $V_{CC} = 5V \pm 10\%$, $t_r, t_f \leq 6ns$ (Figures 1,2,3,4)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{PLH}, t_{PHL}	Propagation Delay Input to Output	S1 Open		6	11	ns
Skew	(Note 8)	S1 Open		0.5	3	ns
t_{TLH}, t_{THL}	Differential Output Rise And Fall Times	S1 Open		6	10	ns
t_{PZH}	Output Enable Time	S1 Closed		12	25	Ns
t_{PZL}	Output Enable Time	S1 Closed		13	26	Ns
t_{PHZ}	Output Disable Time (Note 9)	S1 Closed		4	8	Ns
t_{PLZ}	Output Disable Time (Note 9)	S1 Closed		6	12	Ns
C_{PD}	Power Dissipation Capacitance (Note 10)			100		pF
C_{IN}	Input Capacitance			6		pF

Note 8: Skew is defined as the difference in propagation delays between complementary outputs at the 50% point.

Note 9: Output disable time is the delay from the control input being switched to the Output transistors turning off. The actual disable times are less than indicated due to the delay added by the RC time constant of the load.

Note 10: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V^2 CC f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$


Comparison Table of Switching Characteristics into “LS-Type” Load (Note 11)
 $V_{CC} = 5V$, $T_A = +25^\circ C$, $t_r \leq 6ns$, $t_f \leq 6ns$ (Figures 4,5,6,7,8,9)

Symbol	Parameter	Conditions	DS34C870		DS3487		Units
			Typ	Max	Typ	Max	
t_{PLH}, t_{PHL}	Propagation Delay Input to Output		6	10	10	15	ns
Skew	(Note 8)		1.5	2.0			ns
t_{TLH}, t_{THL}	Differential Output Rise And Fall Times		4	7	10	15	ns
t_{PHZ}	Output Disable Time (Note 9)	$C_L = 50pF, R_L = 200\Omega$, S1 Closed, S2 Closed	8	11	17	25	ns
t_{PLZ}	Output Disable Time (Note 9)	$C_L = 50pF, R_L = 200\Omega$, S1 Closed, S2 Closed	7	10	15	25	ns
t_{PZH}	Output Enable Time	$C_L = 50pF, R_L = \infty$, S1 Closed, S2 Closed	11	19	11	25	ns
t_{PZL}	Output Enable Time	$C_L = 50pF, R_L = 200\Omega$, S1 Closed, S2 Open	14	21	15	25	ns

Note 11: This table is provided for comparison purposes only. The values in this table for the DS34C87 reflect the performance of the device but are not tested or guaranteed.

Note 12: ESD Rating: HBM (15k Ω , 100pF) Input $\geq 1500V$ Output $\geq 1000V$ EIAJ (0 Ω , 200pF) All Pins $\geq 350V$



AC Test Circuit and Switching Time Waveforms

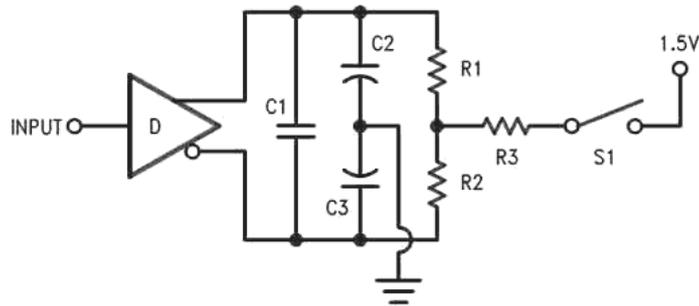

00857603

Note: C1 = C2 = C3 = 40pF(including Probe and Jig Capacitance), R1 = R2 = 50Ω, R3=500Ω

FIGURE 1. AC Test Circuit

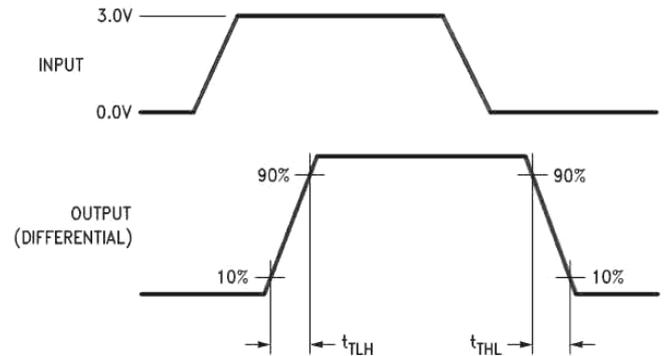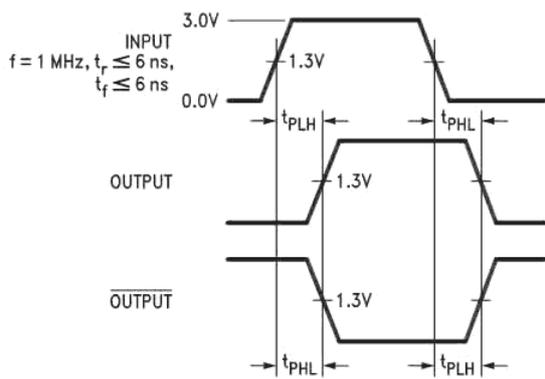

Input pulse; f = 1 MHz, 50%, $t_r \leq 6$ ns, $t_f \leq 6$ ns

FIGURE 2. Propagation Delays

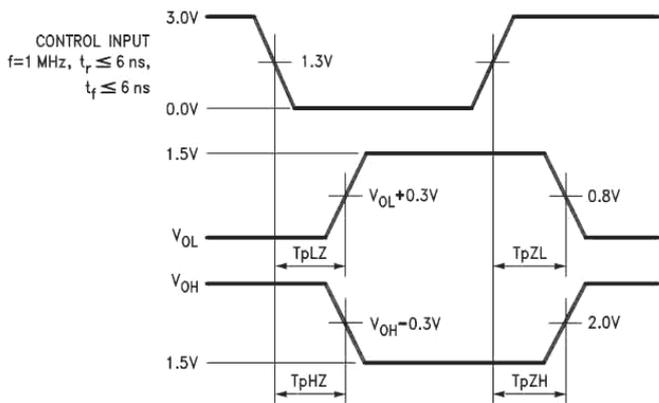


FIGURE 3. Enable and Disable Times

FIGURE 4. Differential Rise and Fall Times


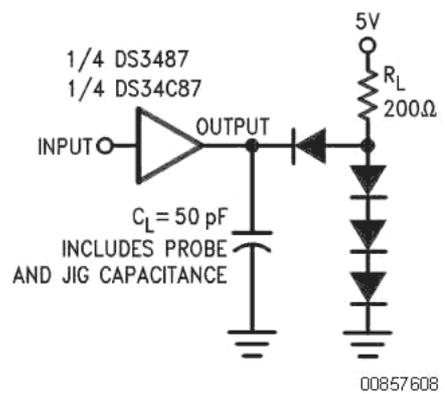



FIGURE 5. Propagation Delays Test Circuit for "LS-Type" Load

AC Test Circuit and Switching Time Waveforms (Continued)

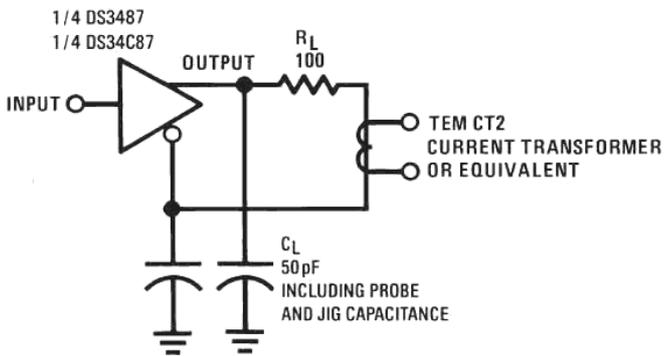


00857606

FIGURE 6. Differential Rise and Fall Times Test Circuit for "LS-Type" Load

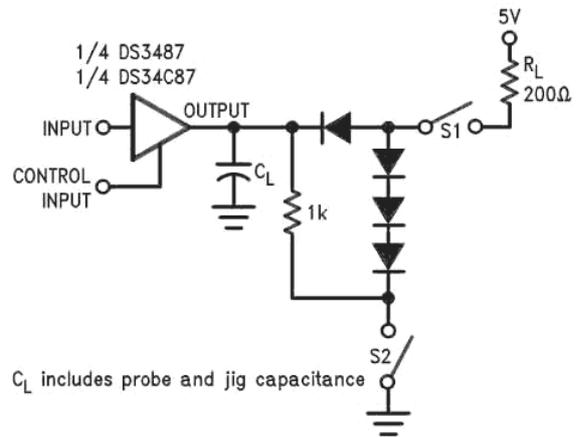


00857609

FIGURE 7. Load Enable and Disable Times Test Circuit for "LS-Type" Load

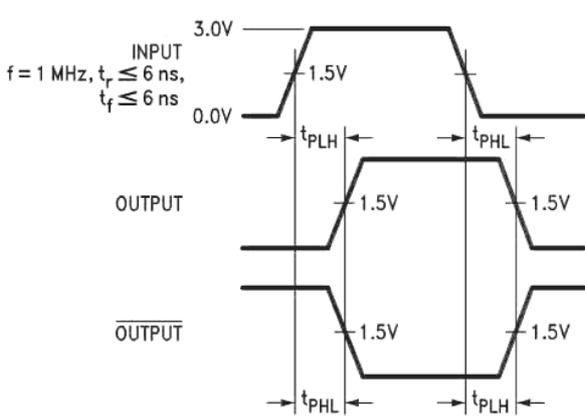

00857610


FIGURE 8. Load Propagation Delays for "LS-Type" Load

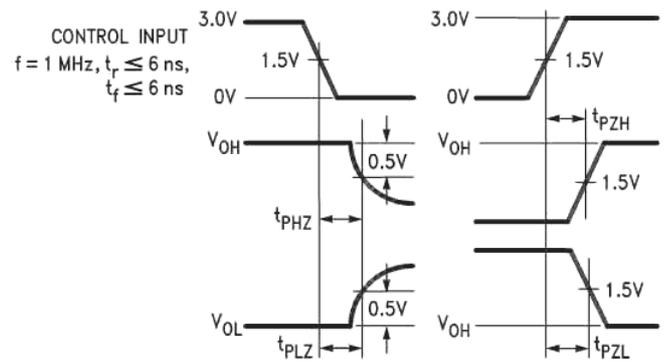

00857611

FIGURE 9. Load Enable and Disable Times for "LS-Type" load

Typical Applications

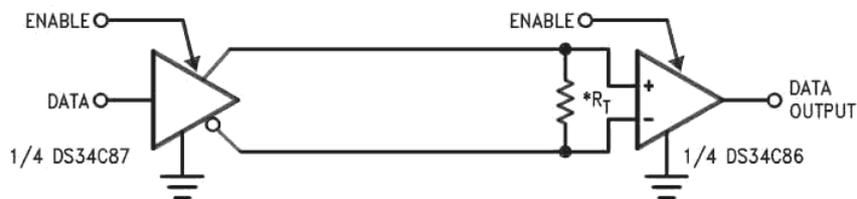


00857612

*RT is optional although highly recommended to reduce reflection.


Pin Description Table

Pin Number (DIP or SOP package)	Pin Name	Function
1	INPUT A	Channel A –TTL/CMOS input
2	OUTPUT A – True	True Output for Channel A, RS422 Levels
3	OUTPUT A - Inverting	Inverting Output for Channel A, RS422 Levels
4	A/B CONTROL	Enable Pin for Channels A and B, Active High, TTL/CMOS Levels
5	OUTPUT B - Inverting	Inverting output for channel B, RS422 Levels
6	OUTPUT B -True	True Output for Channel B, RS422 Levels
7	INPUT B	Channel B –TTL/CMOS input
8	GND	Ground Pin (0V)
9	INPUT C	Channel C –TTL/CMOS input
10	OUTPUT C – True	True Output for Channel C, RS422 Levels
11	OUTPUT C - Inverting	Inverting Output for Channel C, RS422 Levels
12	C/D CONTROL	Enable Pin for Channels C and D, Active High, TTL/CMOS Levels
13	OUTPUT D - Inverting	Inverting Output for channel D, RS422 Levels
14	OUTPUT D- True	True Output for Channel D, RS422 Levels
15	INPUT D	Channel D –TTL/CMOS input
16	Vcc	Power Supply pin, 5.0V typical

Physical Dimensions inches (millimeters) unless otherwise noted

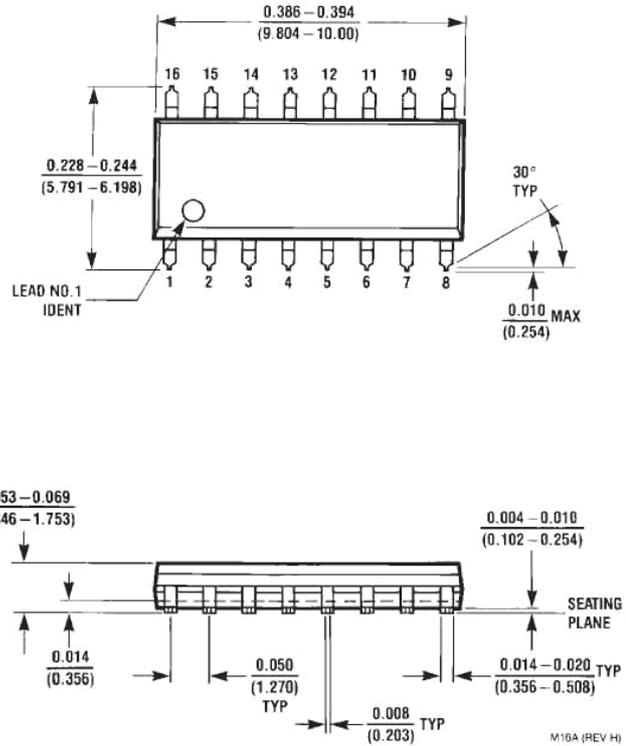

**16-Lead Molded Package
Small Outline (M)
Order Number DS34C87TM
NS Package Number M16A**

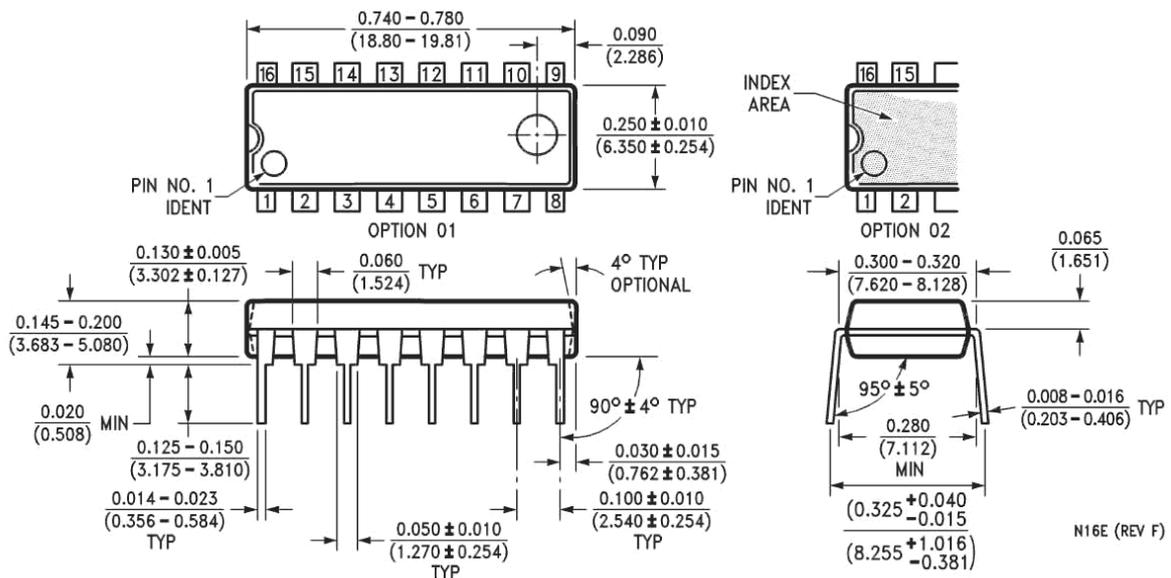

**16-Lead Molded Dual-In-Line Package (N)
Order Number DS34C87TN
NS Package Number N16E**