

MJE13001

NPN Triple Diffused Planar Type High Voltage Transistor

Description

The MJE13001 is a medium power transistor designed for use in switching applications.

Features

- High breakdown voltage
- Low collector saturation voltage
- Fast switching speed


Absolute Maximum Ratings

- Maximum Temperatures
 - Storage Temperature -55 ~ +150 °C
 - Junction Temperature +150 °C
- Maximum Power Dissipation
 - Total Power Dissipation ($T_A=25^{\circ}\text{C}$) 1 W
 - Total Power Dissipation ($T_C=25^{\circ}\text{C}$) 10 W
- Maximum Voltages and Currents
 - BV_{CBO} Collector to Base Voltage 600 V
 - BV_{CEO} Collector to Emitter Voltage 400 V
 - BV_{EBO} Emitter to Base Voltage 6 V
 - I_C Collector Current (DC) 300 mA
 - I_C Collector Current (Pulse) 600 mA
 - I_B Base Current (DC) 40 mA
 - I_B Base Current (Pulse) 100 mA






Electrical Characteristics ($T_A=25^{\circ}\text{C}$)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV_{CBO}	600	-	-	V	$I_C=100\mu\text{A}$
BV_{CEO}	400	-	-	V	$I_C=10\text{mA}$
BV_{EBO}	6	-	-	V	$I_E=10\mu\text{A}$
I_{CBO}	-	-	10	μA	$V_{CB}=550\text{V}$
I_{CEO}	-	-	10	μA	$V_{CB}=400\text{V}$
I_{EBO}	-	-	10	μA	$V_{EB}=6\text{V}$
$*V_{CE(sat)1}$	-	-	400	mV	$I_C=50\text{mA}, I_B=10\text{mA}$
$*V_{CE(sat)2}$	-	-	750	mV	$I_C=100\text{mA}, I_B=20\text{mA}$
$*V_{BE(sat)}$	-	-	1	V	$I_C=50\text{mA}, I_B=10\text{mA}$
$*h_{FE1}$	8	-	-		$V_{CE}=10\text{V}, I_C=10\text{mA}$
$*h_{FE2}$	10	-	36		$V_{CE}=10\text{V}, I_C=50\text{mA}$


*Pulse Test: Pulse Width $\leq 380\mu\text{s}$, Duty Cycle $\leq 2\%$

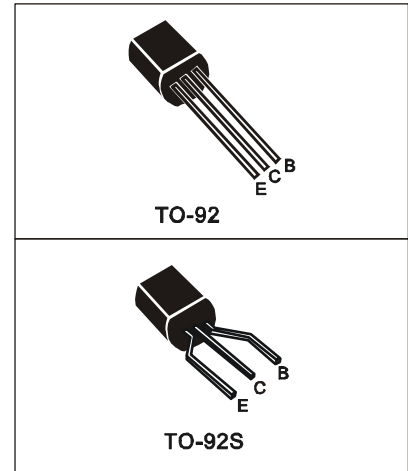

Characteristics Curve

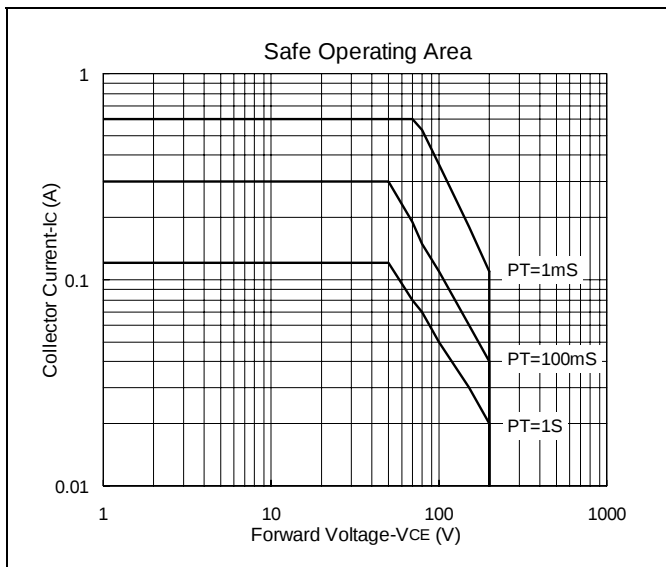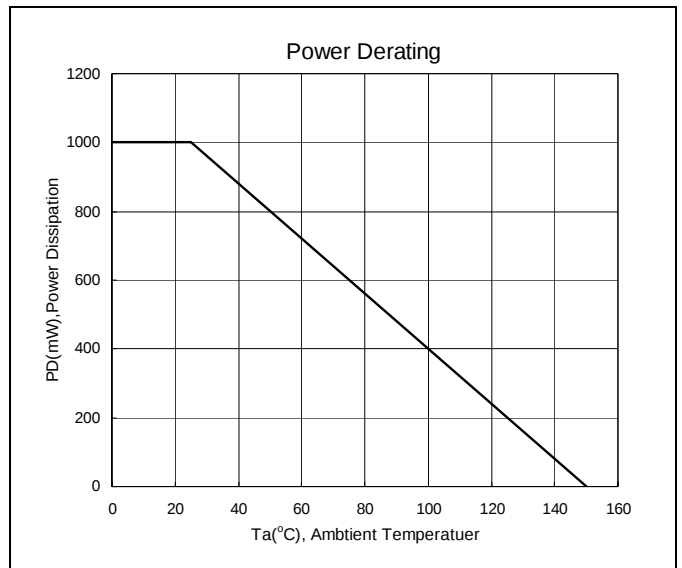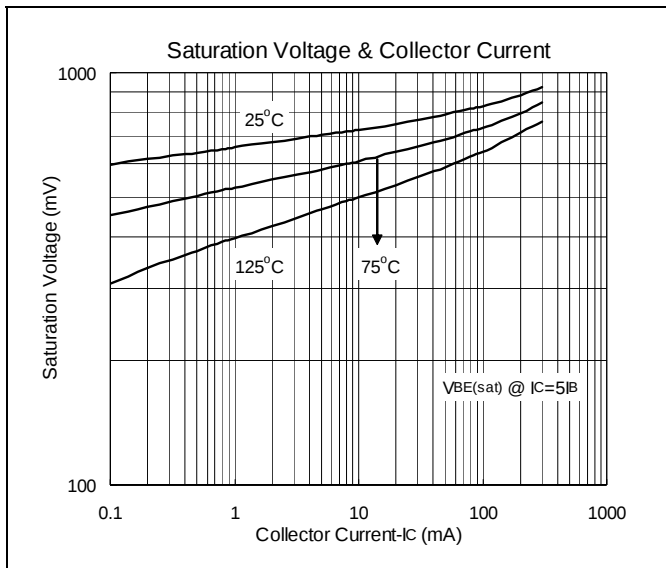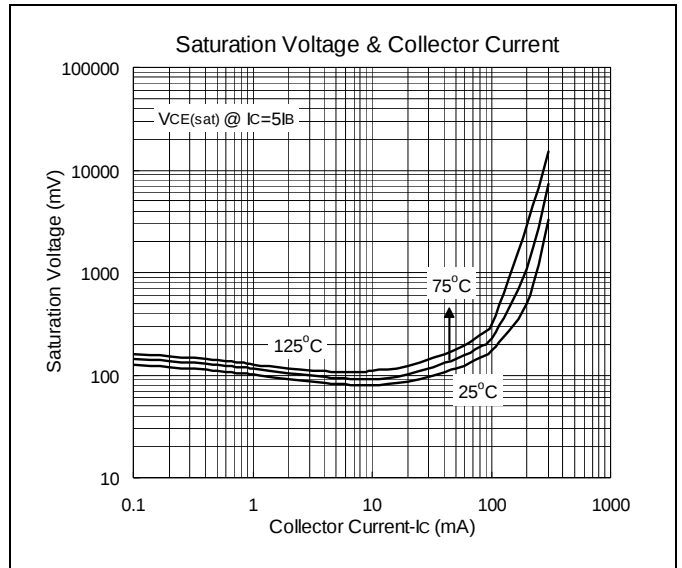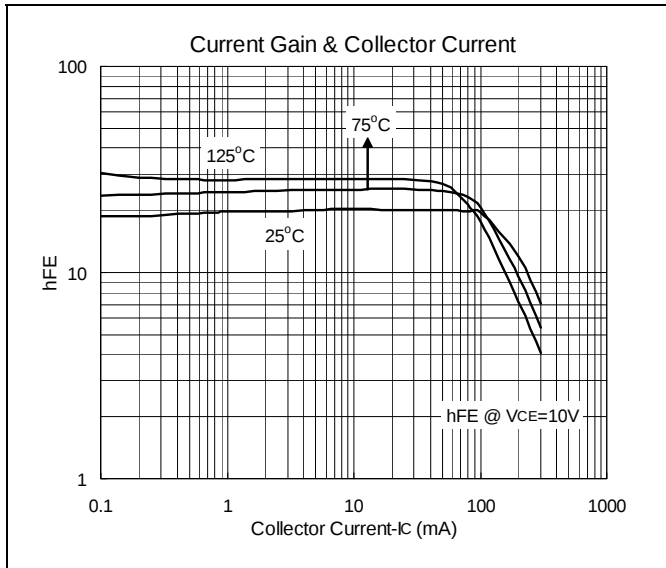


TO-92 Dimension

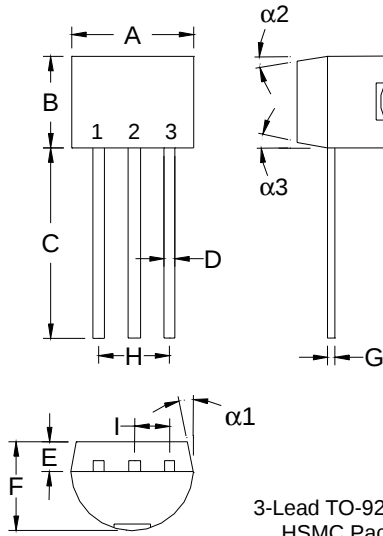

DIM	Min.	Max.
A	4.33	4.83
B	4.33	4.83
C	12.70	-
D	0.36	0.56
E	-	*1.27
F	3.36	3.76
G	0.36	0.56
H	-	*2.54
I	-	*1.27
α1	-	*5°
α2	-	*2°
α3	-	*2°

*: Typical, Unit: mm

TO-92 Taping Dimension

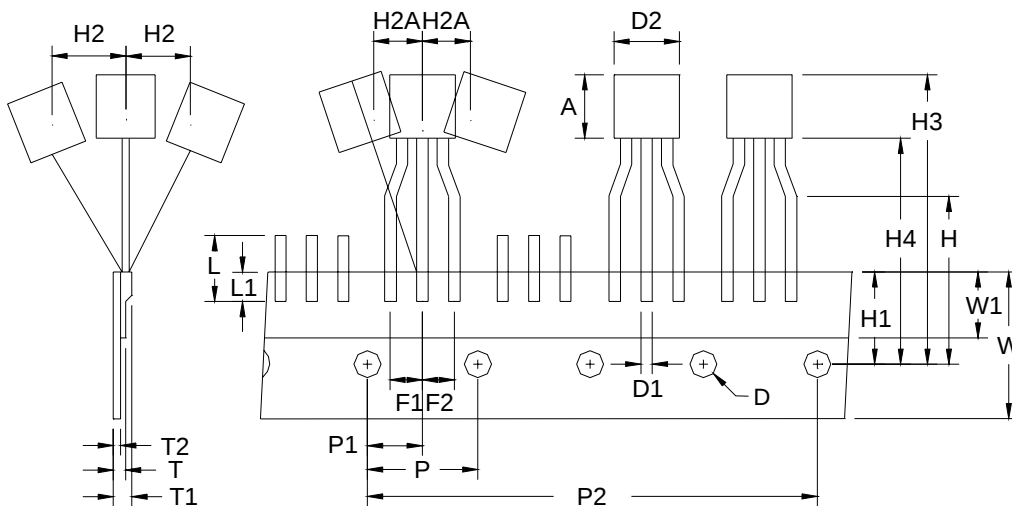

DIM	Min.	Max.
A	4.33	4.83
D	3.80	4.20
D1	0.36	0.53
D2	4.33	4.83
F1,F2	2.40	2.90
H	15.50	16.50
H1	8.50	9.50
H2	-	1
H2A	-	1
H3	-	27
H4	-	21
L	-	11
L1	2.50	-
P	12.50	12.90
P1	5.95	6.75
P2	50.30	51.30
T	-	0.55
T1	-	1.42
T2	0.36	0.68
W	17.50	19.00
W1	5.00	7.00

Unit: mm


Head Office And Factory:

• Head Office
Tel:86-755-83685577 Fax:86-755-83681315

Soldering Methods for HSMC's Products

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

Figure 1: Temperature profile

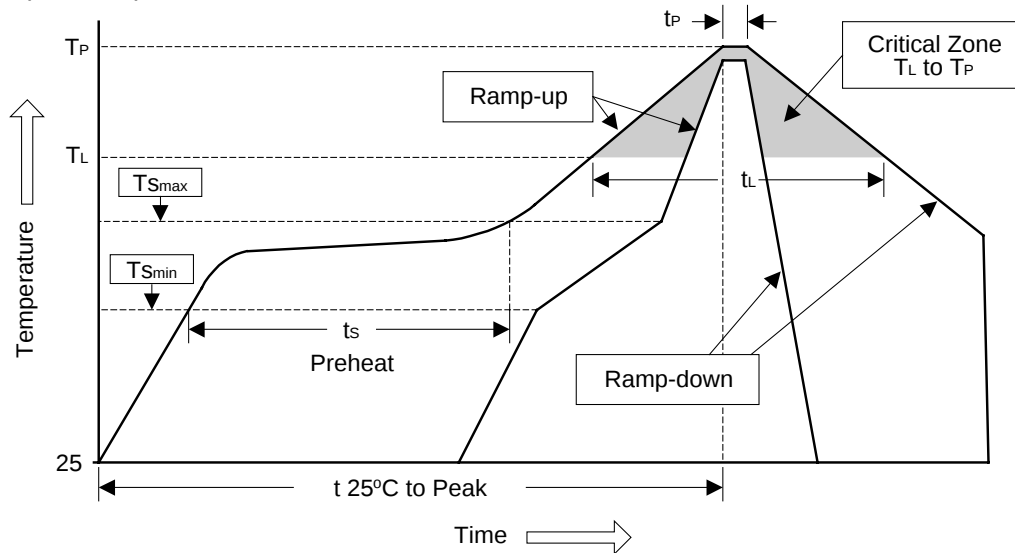

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min (T_{smin})	100°C	150°C
- Temperature Max (T_{smax})	150°C	200°C
- Time (min to max) (t_s)	60~120 sec	60~180 sec
T_{smax} to T_L		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature (T_L)	183°C	217°C
- Time (t_L)	60~150 sec	60~150 sec
Peak Temperature (T_P)	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature (t_P)	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices.	245°C ±5°C	5sec ±1sec
Pb-Free devices.	260°C +0/-5°C	5sec ±1sec